


General Description

The LM35 series are precision integrated-circuit temperature devices with an output voltage linearly proportional to the Centigrade temperature. The LM35 device has an advantage over linear temperature sensors calibrated in Kelvin, as the user is not required to subtract a large constant voltage from the output to obtain convenient Centigrade scaling. The LM35 device does not require any external calibration or trimming to provide typical accuracies of $\pm 0.5^{\circ}\text{C}$ at room temperature and $\pm 1.5^{\circ}\text{C}$ over a full -40°C to 125°C temperature range. Lower cost is assured by trimming and calibration at the wafer level. The low-output impedance, linear output, and precise inherent calibration of the LM35 device makes interfacing to readout or control circuitry especially easy. The device is used with single power supplies, or with plus and minus supplies. As the LM35 device draws only $60\ \mu\text{A}$ from the supply, it has very low self-heating of less than 0.1°C in still air.

The LM35 device is available in SOP8 ,TO92 and TO220 packaging.

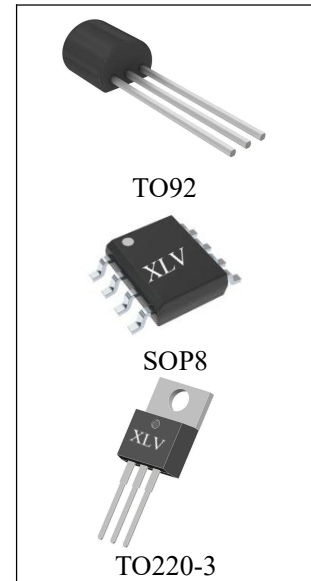


Features

- Calibrated Directly in Celsius (Centigrade)
- Linear + 10 mV / $^{\circ}\text{C}$ Scaling Factor
- 0.5°C Ensured Accuracy (at 25°C)
- Rated temperature ranges from -40°C to 125°C
- Suitable for Remote Applications
- Low-Cost Due to Wafer-Level Trimming
- Operates From 4 V to 30 V
- Less Than $60\text{-}\mu\text{A}$ Current Drain
- Low Self-Heating, 0.08°C in Still Air
- Low-Impedance Output, $0.1\ \Omega$ for 1-mA Load


Package Information

Order Information	Making ID	Package Type	Eco Plan	Packing Type Supplied As
LM35DZ	XLV XX LM35DZ	TO92	RoHS & HF	1000 Units on Bag 2000 Units on Tube
LM35DM	XLV XX LM35DM	SOP8	RoHS & HF	100 Units on Tube 2500 Units on Reel
LM35DT	XLV XX LM35DT	TO220	RoHS & HF	50 Units on Tube


Pin Connection



LM35DZ(TO92)
(Bottom View)

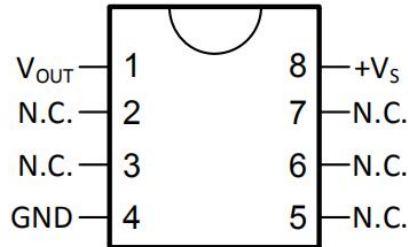

LM35DM(SOP8)
(Top View)

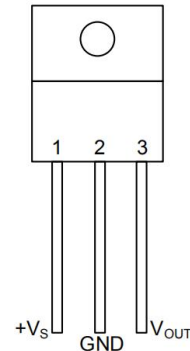

LM35DT(TO220-3)
(Top View)

Pin Functions

NAME	PIN			TYPE	DESCRIPTION
	TO92	TO220	SOP8		
V _{OUT}	2	3	1	O	Temperature Sensor Analog Output
N.C.	—	—	2	—	No Connection
N.C.	—	—	3	—	
GND	3	2	4	GROUND	Device ground pin, connect to power supply negative terminal
N.C.	—	—	5	—	No Connection
N.C.	—	—	6		
N.C.	—	—	7		
+V _S	1	1	8	POWER	Positive power supply pin

Applications

- Power Supplies
- Battery Management
- HVAC
- Electrical Equipment

Absolute Maximum Ratings

(over operating free-air temperature range (unless otherwise noted)⁽¹⁾)

	MIN	MAX	UNIT
Supply voltage	-0.2	35	V
Output voltage	-1	6	V
Output current		10	mA
Maximum Junction Temperature, T _{Jmax}		150	°C
Storage Temperature, T _{stg}	TO92	-60	°C
	TO220, SOP8	-65	

(1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. DC and AC electrical specifications do not apply when operating the device beyond its rated operating conditions.

ESD Ratings

		VALUE	UNIT
V _(ESD)	Electrostatic discharge Human-body model (HBM)	±2500	V

Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Specified operating temperature: T _{MIN} to T _{MAX}	LM35C	-40	125	°C
	LM35D	0	100	
Supply Voltage (+V _S)		4	30	V

Electrical Characteristics:LM35C, LM35D Limits

Unless otherwise noted, these specifications apply: $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ for the LM35C; and $0^{\circ}\text{C} \leq T_J \leq 100^{\circ}\text{C}$ for the LM35D. $V_S = 5\text{Vdc}$ and $I_{\text{LOAD}} = 50 \mu\text{A}$, in the circuit of Full-Range Centigrade Temperature Sensor. These specifications also apply from 2°C to T_{MAX} in the circuit of Figure 1.

PARAMETER	TEST CONDITIONS	LM35C, LM35D			UNIT
		TYP	TESTED LIMIT ⁽¹⁾	DESIGN LIMIT ⁽²⁾	
Accuracy, LM35C ⁽³⁾	T _A = 25°C	±0.4	±1		°C
	T _A = -10°C	±0.5		±1.5	
	T _A = T _{MAX}	±0.8		±1.5	
	T _A = T _{MIN}	±0.8		±2	
Accuracy, LM35D ⁽³⁾	T _A = 25°C	±0.6	±1.5		°C
	T _A = T _{MAX}	±0.9		±2	
	T _A = T _{MIN}	±0.9		±2	
Nonlinearity ⁽⁴⁾	T _{MIN} ≤ T _A ≤ T _{MAX} , -40°C ≤ T _J ≤ 125°C	±0.2		±0.5	°C
Sensor gain (average slope)	T _{MIN} ≤ T _A ≤ T _{MAX} , -40°C ≤ T _J ≤ 125°C	10		9.8	mV/°C
		10		10.2	
Load regulation ⁽⁵⁾ 0 ≤ I _L ≤ 1 mA	T _A = 25°C	±0.4	±2		mV/mA
	T _{MIN} ≤ T _A ≤ T _{MAX} , -40°C ≤ T _J ≤ 125°C	±0.5		±5	
Line regulation ⁽⁵⁾	T _A = 25°C	±0.01	±0.1		mV/V
	4 V ≤ V _S ≤ 30 V, -40°C ≤ T _J ≤ 125°C	±0.02		±0.2	
Quiescent current ⁽⁶⁾	V _S = 5 V, 25°C	56	80		μA
	V _S = 5 V, -40°C ≤ T _J ≤ 125°C	91		138	
	V _S = 30 V, 25°C	56.2	82		
	V _S = 30 V, -40°C ≤ T _J ≤ 125°C	91.5		141	
Change of quiescent current ⁽⁵⁾	4 V ≤ V _S ≤ 30 V, 25°C	0.2	2		μA
	4 V ≤ V _S ≤ 30 V, -40°C ≤ T _J ≤ 125°C	0.5		3	
Temperature coefficient of quiescent current	-40°C ≤ T _J ≤ 125°C	0.39		0.7	μA/°C
Minimum temperature for rate accuracy	In circuit of Figure 1, I _L = 0	1.5		2	°C
Long term stability	T _J = T _{MAX} , for 1000 hours	±0.08			°C

(1) Tested Limits are ensured and 100% tested in production.

- (2) Design Limits are ensured (but not 100% production tested) over the indicated temperature and supply voltage ranges. These limits are not used to calculate outgoing quality levels.
- (3) Accuracy is defined as the error between the output voltage and $10 \text{ mV}/^{\circ}\text{C}$ times the case temperature of the device, at specified conditions of voltage, current, and temperature (expressed in $^{\circ}\text{C}$).
- (4) Non-linearity is defined as the deviation of the output-voltage-versus-temperature curve from the best-fit straight line, over the rated temperature range of the device.
- (5) Regulation is measured at constant junction temperature, using pulse testing with a low duty cycle. Changes in output due to heating effects can be computed by multiplying the internal dissipation by the thermal resistance.
- (6) Quiescent current is defined in the circuit of Figure 1.


Detailed Description

Overview

The LM35-series devices are precision integrated-circuit temperature sensors, with an output voltage linearly proportional to the Centigrade temperature. The LM35 device has an advantage over linear temperature sensors calibrated in Kelvin, as the user is not required to subtract a large constant voltage from the output to obtain convenient Centigrade scaling. The LM35 device does not require any external calibration or trimming to provide typical accuracies of $\pm 0.5^{\circ}\text{C}$ at room temperature and $\pm 1.5^{\circ}\text{C}$ over a full temperature range. Lower cost is assured by trimming and calibration at the wafer level. The low output impedance, linear output, and precise inherent calibration of the LM35 device makes interfacing to readout or control circuitry especially easy. The device is used with single power supplies, or with plus and minus supplies. As the LM35 device draws only $60 \mu\text{A}$ from the supply, it has very low self-heating of less than 0.1°C in still air. The temperature-sensing element is comprised of a delta-V BE architecture.

The temperature-sensing element is then buffered by an amplifier and provided to the VOUT pin. The amplifier has a simple class A output stage with typical $0.5\text{-}\Omega$ output impedance as shown in the Functional Block Diagram. Therefore the LM35 can only source current and its sinking capability is limited to $1 \mu\text{A}$.

Functional Block Diagram

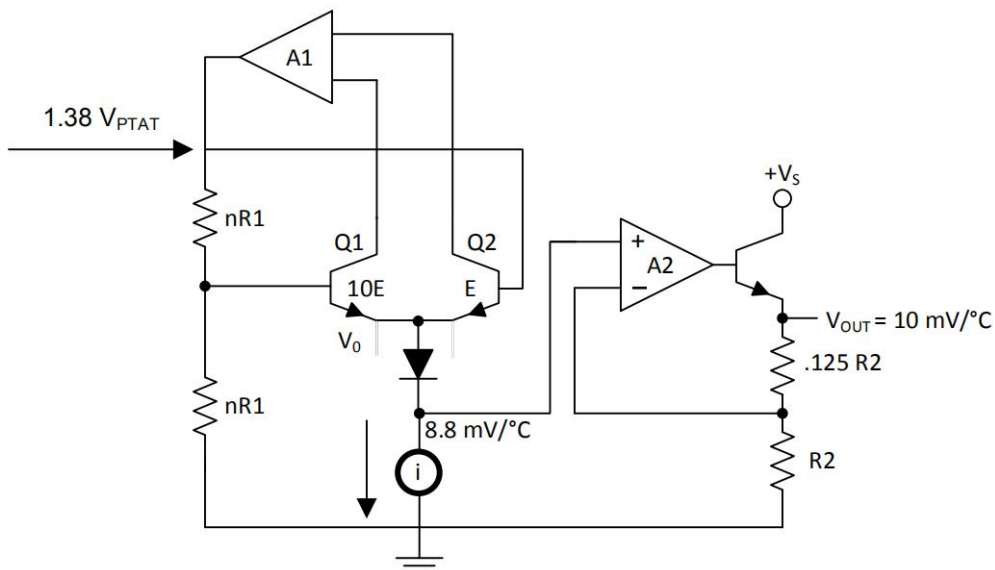

Feature Description

LM35 Transfer Function

The accuracy specifications of the LM35 are given with respect to a simple linear transfer function:

$$V_{OUT} = 10 \text{ mV}/^{\circ}\text{C} \times T$$

where

- V_{OUT} is the LM35 output voltage
- T is the temperature in $^{\circ}\text{C}$

(1)

Device Functional Modes

The only functional mode of the LM35 is that it has an analog output directly proportional to temperature.

Typical Application

Basic Centigrade Temperature Sensor

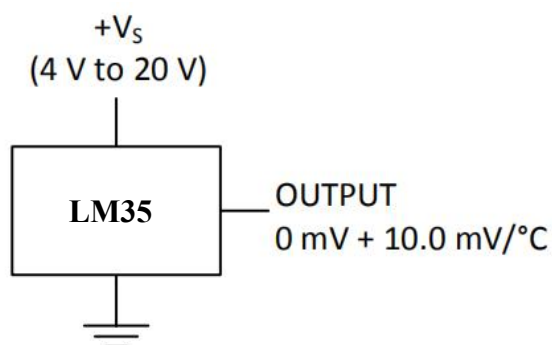


Figure 1. Basic Centigrade Temperature Sensor (2°C to 150°C)

System Examples

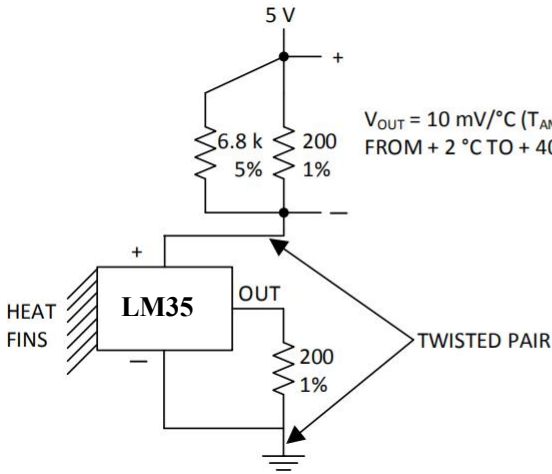


Figure 2. Two-Wire Remote Temperature Sensor
(Grounded Sensor)

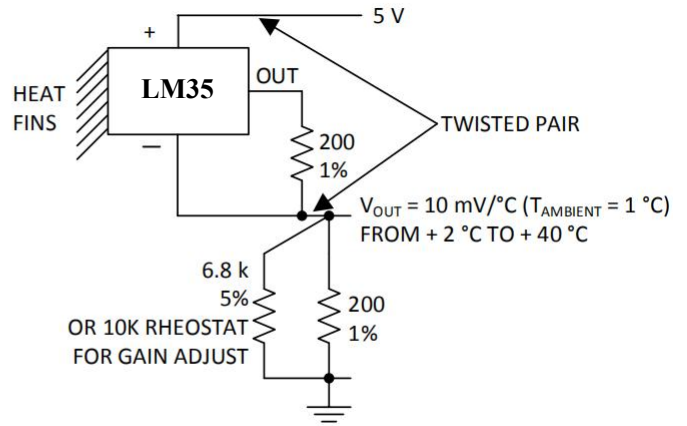


Figure 3. Two-Wire Remote Temperature Sensor
(Output Referred to Ground)

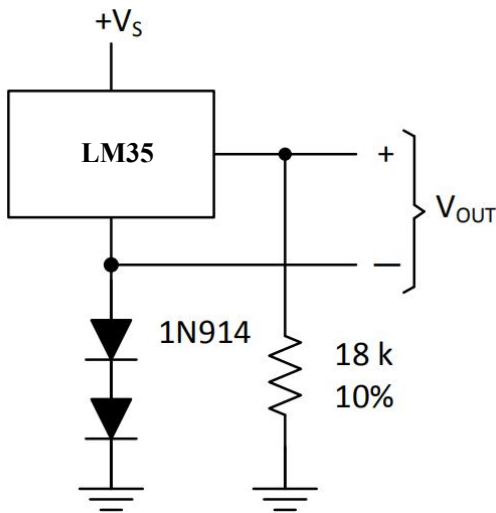


Figure 4. Temperature Sensor, Single Supply
(-40°C to $+125^{\circ}\text{C}$)

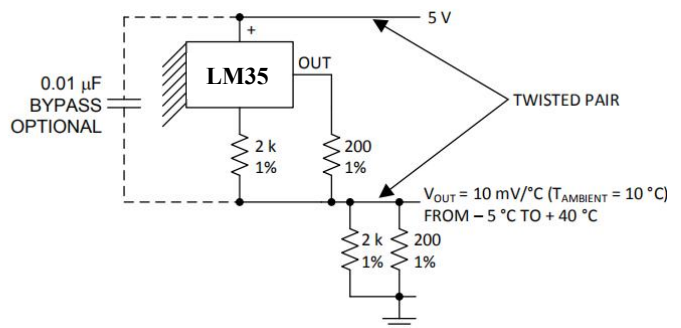


Figure 5. Two-Wire Remote Temperature Sensor
(Output Referred to Ground)

System Examples (continued)

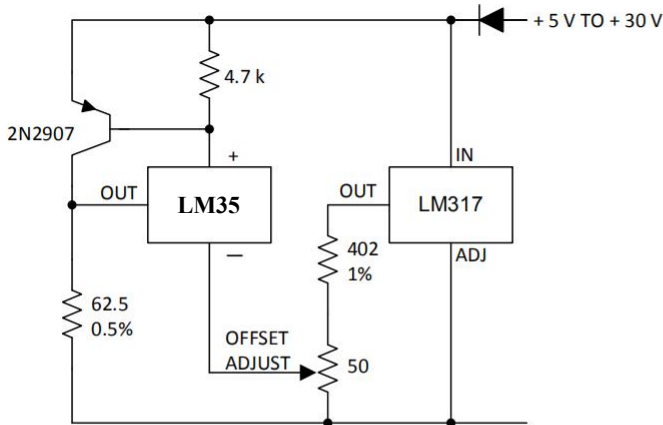


Figure 6. 4-To-20 mA Current Source
(0°C to 100°C)

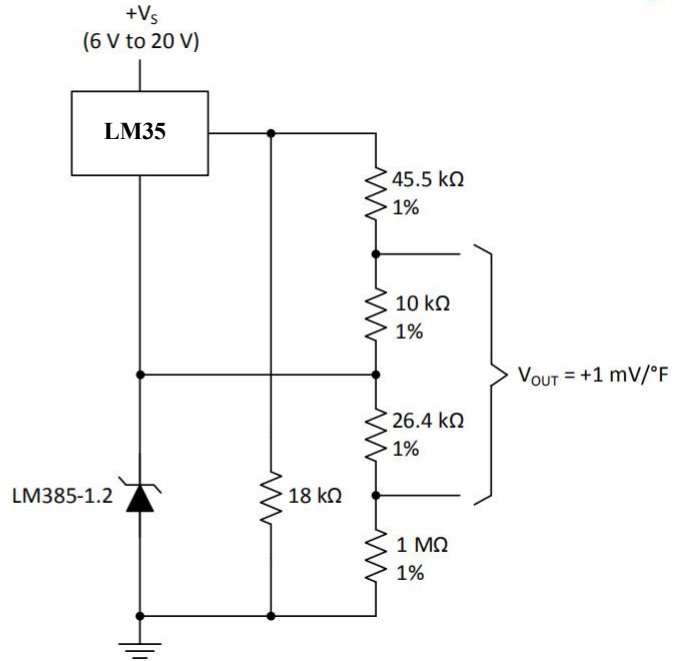


Figure7. Fahrenheit Thermometer

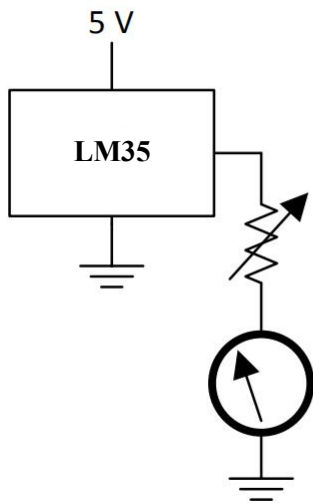


Figure 8. Centigrade Thermometer
(Analog Meter)

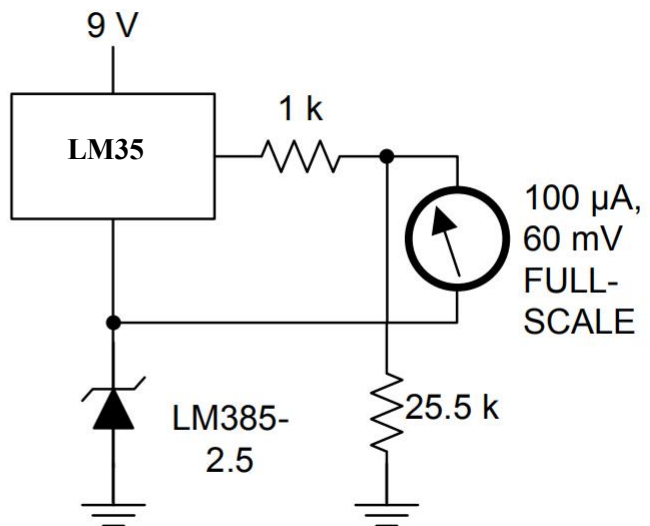



Figure 9. Fahrenheit Thermometer, Expanded Scale Thermometer
(50°F to 80°F, for Example Shown)

Outline Dimensions

TO92

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
A2	0.280	0.510	0.011	0.020
D	4.300	4.700	0.169	0.185
E	0.360	0.560	0.014	0.022
E1	4.300	4.700	0.169	0.185
e	1.270 (BSC)		0.050 (BSC)	

SOP8

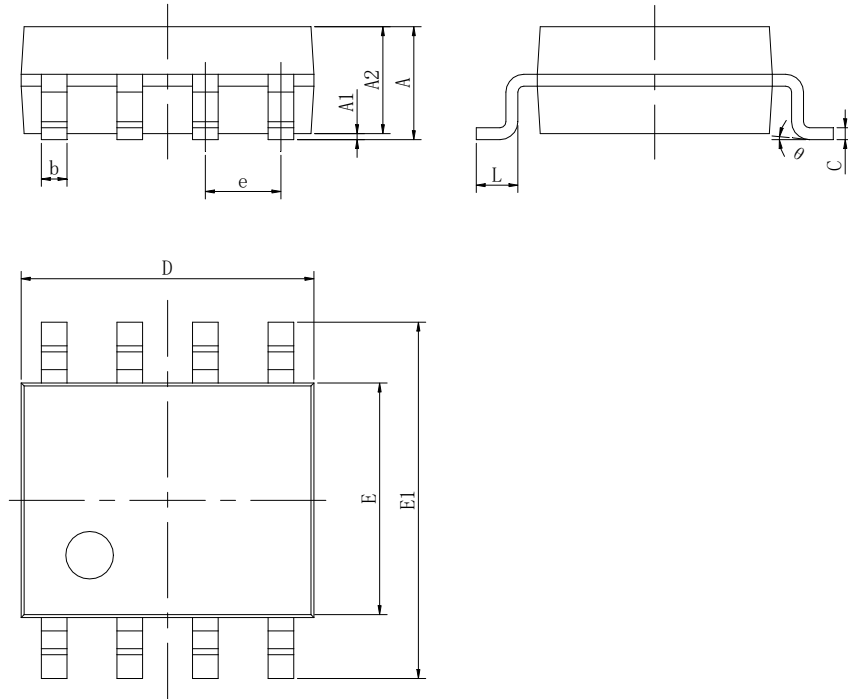

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.800	0.053	0.071
A1	0.000	0.250	0.000	0.010
A2	1.250	1.550	0.053	0.061
b	0.300	0.510	0.011	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.201
E	3.800	4.000	0.150	0.157
E1	5.800	6.300	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

TO220-3

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.300	4.800	0.169	0.189
A1	0.340	0.600	0.013	0.023
A2	1.220	1.400	0.047	0.055
B	9.460	10.380	0.372	0.408
B1	12.880	13.760	0.507	0.541
D	14.410	15.900	0.567	0.626
D1	8.000	9.000	0.314	0.354
E	9.700	10.400	0.381	0.409
E1	0.700	0.900	0.027	0.036
E2	1.220	1.400	0.048	0.055
e	2.540 (BSC)		0.984 (BSC)	
F	Φ3.800	Φ3.900	Φ0.149	Φ0.153

- ❖ XLV reserves the right to modify any products or specifications described in this document at any time without prior notice. Customers must confirm that the specification documentation obtained is the latest version and verify the completeness and accuracy of all information before placing orders.
- ❖ Any semiconductor product may fail or malfunction under specific conditions. When using XLV products for system design and machine manufacturing, customers must strictly comply with applicable safety standards and adopt all necessary safeguards to mitigate potential failure risks, thereby preventing personal injury or property damage.
- ❖ XLV will continuously pursue optimization of product performance and quality, striving to provide customers with superior integrated circuit solutions.